


# TB Series

DRUM PUMPS

## Light to Medium Viscosity

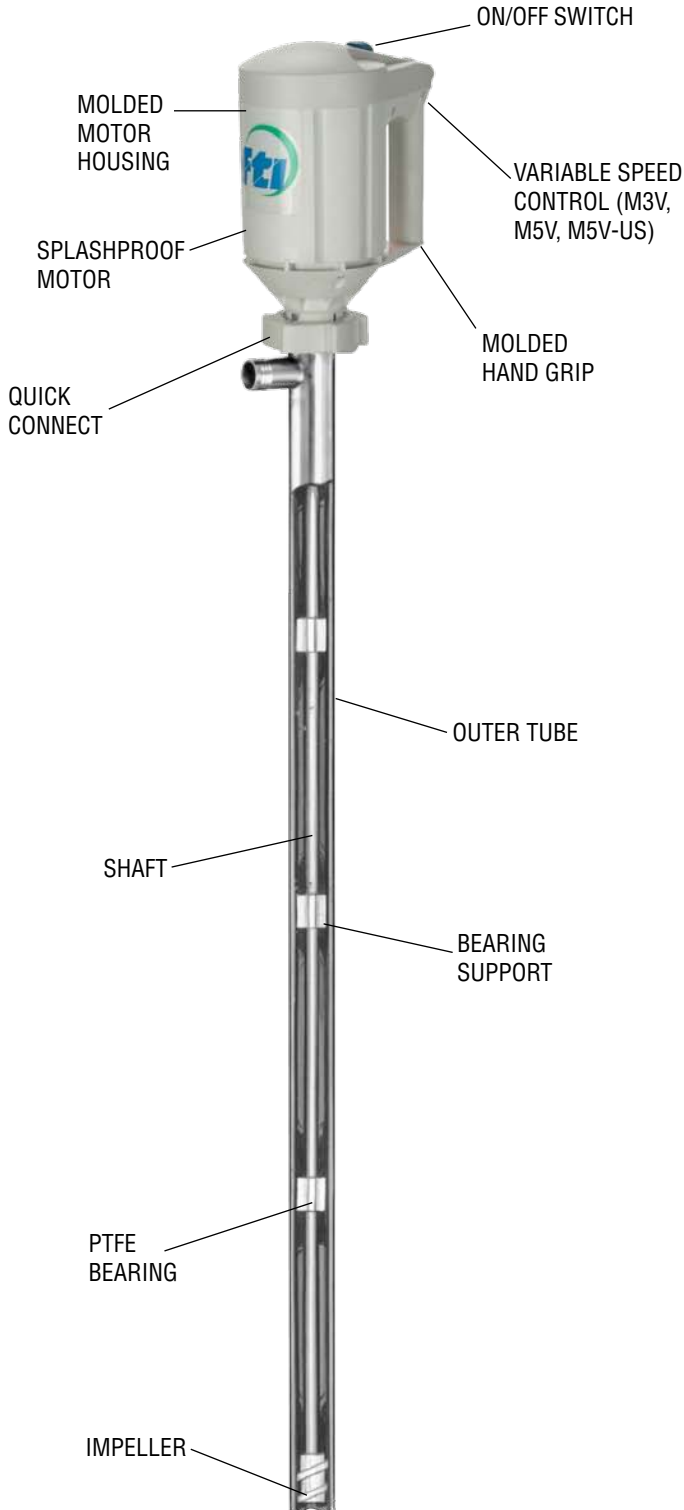

The TB series is a light weight alternative to handle light viscosity chemicals. Finish Thompson Inc. designed this model to fit smaller opening containers.

### Features

- Sealed
- Unique lifting compressor design
- Handles mild corrosives and solvents
- Pump interchangeable with motors
- Stainless steel construction

### Performance


- Viscosities up to 200 cP
- Densities up to 1.4 specific gravity
- Maximum 150°F (66°C)

ELECTRIC (50/60 Hz)

- 20 gpm
- 28 feet TDH

AIR

- 15 gpm
- 16 feet TDH

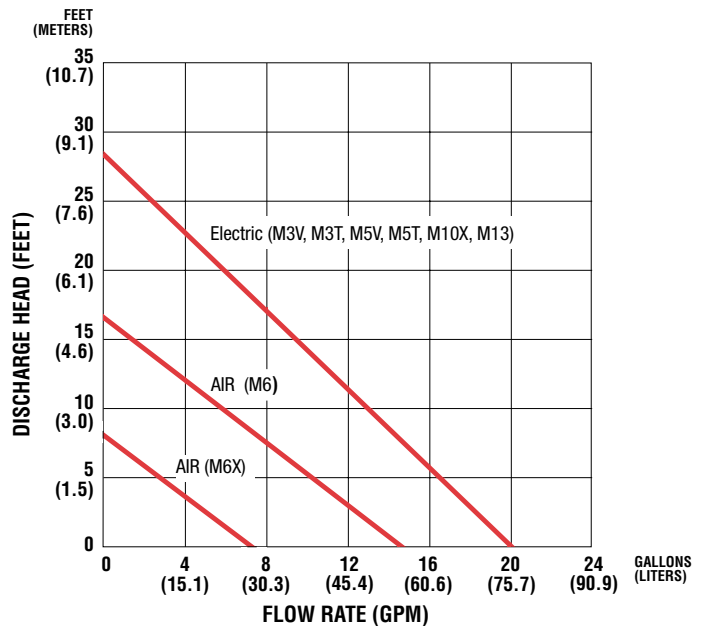

## Tube Specifications



TBS

MODEL	TUBE				SEAL	SHAFT	INTERNALS	HOSE SIZE REQUIRED
	MATERIAL	DIA.	LENGTH					
			in.	cm				
TBS	316 Stainless Steel	1-1/2" (3.8 cm)	40	102	Graphite Filled PTFE	316 Stainless Steel	PTFE	1"

## Motor Specifications



Electric motors are available in 115V or 230V, single phase, 50/60 Hz and variable speed. All are equipped with 12 ft. (366 cm) cord, circuit breaker with manual reset, internal cooling fan, and built-in on/off switch. Motors are rated continuous duty.



M6X

M6

Air motors (M6, M6X) shown with ball valve and muffler.

Model	Type	Certifications	Electrical Requirements	Input		RPM	Max. Viscosity cP
				HP	W		
<b>ODP (Open Drip Proof) IP24 Motors</b>							
M3V	Universal - Variable Speed	CSA	115VAC/50-60 Hz	4/5	650	3,500-10,000	500
M5V	Universal - Variable Speed	CE	230VAC/50-60 Hz	4/5	650	3,500-10,000	500
M5V-US*	Universal - Variable Speed	CE	230VAC/50-60 Hz	4/5	650	3,500-10,000	500
M13	Universal - Single Speed	CE	115VAC/50-60 Hz	4/5	640	10,000	500
<b>TEFC (Totally Enclosed Fan Cooled) IP54 Motors</b>							
M3T	Universal - Single Speed	CSA	115VAC/50-60 Hz	4/5	640	10,000	500
M5T	Universal - Single Speed	CE	230VAC/50-60 Hz	4/5	640	10,000	500
<b>EXP (Explosion-proof) IP54 Motors</b>							
M10X***	EXP - Class 1, Division 1, Group D	CE ExII 2G Ex d IIA T4	230VAC/50-60 Hz	4/5	640	10,000	500
<b>Air Motors</b>							
M6****	Non-Electric (Air)	CE Ex II 5GDc +1CTa +40C	Air Requirements 80-100 psi @ 15-32 cfm	1/2	370	300-9,000	330
M6X****	Non-Electric (Air)	CE Ex II 5GDc +1CTa +40C	Air Requirements 80-100 psi@ 15-32 cfm	3/4	560	300-6,000	330

Note: When pumping flammables or combustibles, use explosion-proof electric or non-electric (air) motors on stainless steel tubes with a static protection kit.

\*Suitable for 230V, 60 Hz. Includes a NEMA 6-15 plug.

\*\*\*Recommended for pumping non-flammables in an explosionproof environment.

\*\*\*\*An air motor is a non-electrical device which means the possibility of explosion from igniting flammables or combustibles is reduced. Air motor performance will depend upon user's compressor and system set up.



**FINISH THOMPSON INC.**

921 Greengarden Road • Erie, PA 16501-1591 U.S.A.  
Ph 814-455-4478 • Fax 814-455-8518

Email [fti@finishthompson.com](mailto:fti@finishthompson.com) • [www.finishthompson.com](http://www.finishthompson.com)

Toll Free USA & Canada 1-800-934-9384  
Literature I.D.No. - FT95-567H, 4617-09

