


**125A 4- and 5-pole up to 690 V**

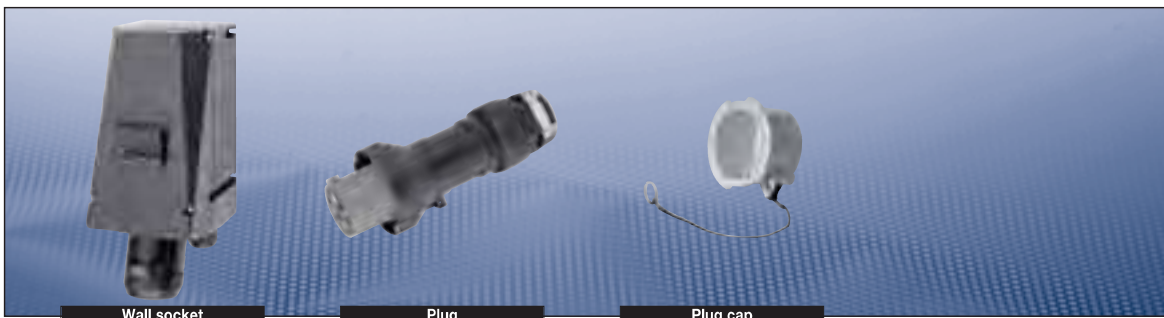

**Ordering details**

Voltage	h	Type	Auxiliary contact	Cable entries	Weight approx.	Order No.
<b>Type 125 A 4-pole</b>						
200-250 V		Wall socket	-	KU	12.3 kg	<b>GHG 515 4409 R0001</b>
		Wall socket	-	ME	12.5 kg	<b>GHG 515 4409 R3001</b>
		Wall socket	yes	KH	12.5 kg	<b>GHG 515 4409 R0501</b>
		Plug			0.9 kg	<b>GHG 515 7409 R0001</b>
380-415 V		Wall socket	-	KU	12.3 kg	<b>GHG 515 4406 R0001</b>
		Wall socket	-	ME	12.5 kg	<b>GHG 515 4406 R3001</b>
		Wall socket	yes	KH	12.5 kg	<b>GHG 515 4406 R0501</b>
		Plug			0.9 kg	<b>GHG 515 7406 R0001</b>
480-500 V		Wall socket	-	KU	12.3 kg	<b>GHG 515 4407 R0001</b>
		Wall socket	-	ME	12.5 kg	<b>GHG 515 4407 R3001</b>
		Wall socket	yes	KH	12.5 kg	<b>GHG 515 4407 R0501</b>
		Plug			0.9 kg	<b>GHG 515 7407 R0001</b>
600-690 V		Wall socket	-	KU	12.3 kg	<b>GHG 515 4405 R0001</b>
		Wall socket	-	ME	12.5 kg	<b>GHG 515 4405 R3001</b>
		Wall socket	yes	KH	12.5 kg	<b>GHG 515 4405 R0501</b>
		Plug			0.9 kg	<b>GHG 515 7405 R0001</b>

<b>Type 125 A 5-pole</b>						
200-250 V		Wall socket	-	KU	13.0 kg	<b>GHG 515 4506 R0001</b>
380-415 V		Wall socket	-	ME	13.2 kg	<b>GHG 515 4506 R3001</b>
		Wall socket	yes	KH	13.2 kg	<b>GHG 515 4506 R0501</b>
		Plug			1.2 kg	<b>GHG 515 7506 R0001</b>

**Accessories**

Type	OU	Order No.
Plug cap 4-pole/5-pole	1	<b>GHG 510 1901 R0007</b>
Cable lug 50 mm <sup>2</sup>	5	<b>GHG 260 1911 R0004</b>

Other voltage ranges and versions available on request.

KU = 1 x plastic cable glands M40 for Ø 17-28 mm, 1 x M40 Ex-screw plug plastic

KH = 1 x plastic cable glands M40 for Ø 16-28 mm,

1 x plastic cable glands M25 for Ø 8 - 17 mm, with auxiliary contact

ME = 2 x metal thread M32 with Ex-screw plug plastic