


Double-Piston Hydraulic Cylinder with Lock Valve

- Operates independently of two pistons
- Compatible with HCWF Chuck



HYDRAULIC CYLINDER

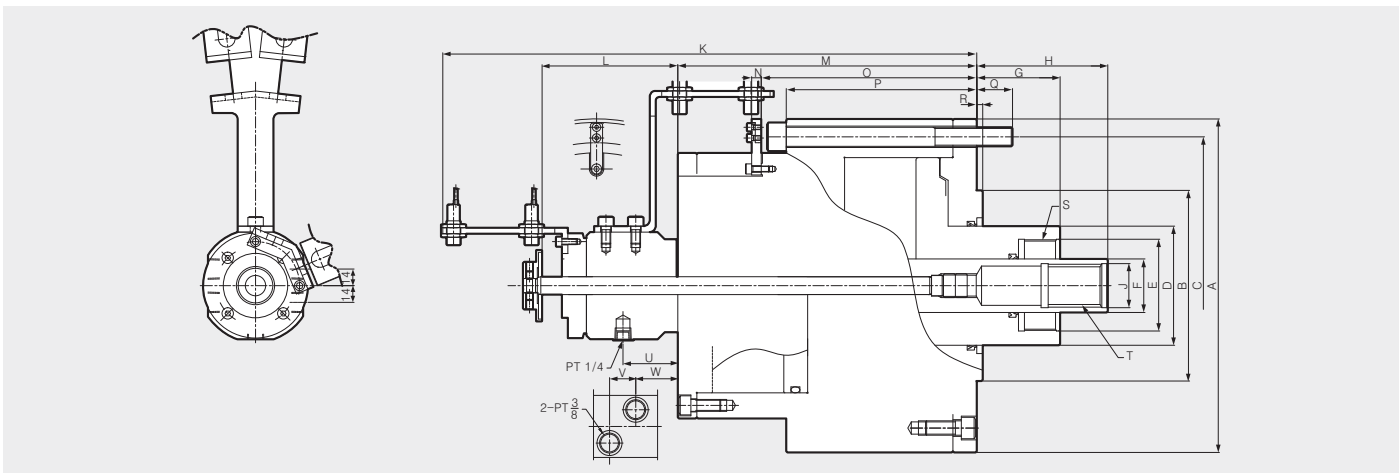

※ Piston A : Outer Piston
Piston B : Inner Piston

Dimensions

	ΦA	ΦB	ΦC	ΦD	ΦE	ΦF	Gmax.	Gmin.	Hmax.	Hmin.	ΦJ	K	L	M	N	O	P	Q	R	S	T	U	V	W
DYV-21560	280	160	250	100	77	45	70	10	110	50	37	448.3	114	251	8	181	160	30	5	M75x2.0	M36x4.0	46	22	35.3

Specifications

Type	Piston Stroke	Piston Force		Piston Area		Max. Operating Pressure	Max. r.p.m.	Weight	GD ²	
		Push [kN(kgf)]	Pull [kN(kgf)]	Push [cm ²]	Pull [cm ²]					
DYV-21560	Piston A	60	16.9(1724)	13.9(1420)	363	299	5.1(50)	3200	-	-
	Piston B		11.8(1206)	11.1(1130)	254	238				

- ※ Specifications are subject to change without notice.
- ※ Maximum turning speed is based upon actual measurement.
- ※ Piston Force : Hydraulic 4.0MPa (40.8kgf/cm²)
- ※ Total leakage pressure: 3.0 Mpa (30.6 kgf/cm²) at 50 ° C.
- ※ Samcully Machinery Co., Ltd. is no longer an OEM manufacturer for Kitagawa® Iron Works Co., Ltd